




# MAXXESS

## Input Module

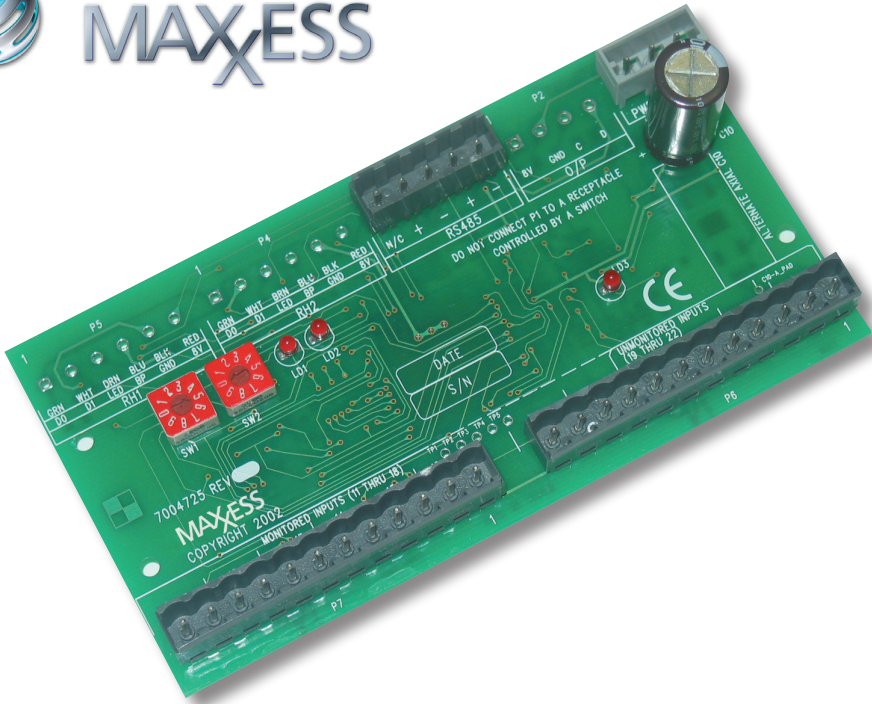

### Input Module

The Input Module controls and manages eight (8) fully supervised and monitored inputs as well as an additional four (4) unsupervised inputs, for a total of twelve (12) inputs per module. The inputs may be individually configured, disabled or inverted.

The open architecture design of the MAXXESS Input Module makes it compatible with MAXXESS Security Management Software, Remote Area Manager (eRAM), and BLP™ 206 Series Processors, allowing flexibility in both new and retrofit applications; and with its modular design, it is an ideal solution for customization and expansion.

The Input Module communicates over an industry standard RS-485 communication bus. For easy installation it may be placed anywhere on the communication bus that is convenient. Installation time and cost have been greatly reduced with this advanced technology.

Several Input Modules can be mounted in a 14" x 14" x 3" locking enclosure with a din rail mounting system. Din rail mount and plug type connections simplify installation and service.

### Features

- **Manages up to eight (8) fully supervised inputs**
- **Manages an additional four (4) unsupervised digital inputs**
- **Networkable via industry standard RS-485 communications**
- **Open Architecture compatibility with MAXXESS Security Management Software, BLP 206 Series Processors, and Remote Area Manager (eRAM)**
- **Alarm Circuit type: normally open, normally closed, unsupervised, supervised (with correct End of Line Resistance Values)**
- **Modular design is ideal for a wide variety of applications**
- **Inputs/Maximum Distance: 3,000 feet from Input Module to Monitored Device (30 ohms maximum)**
- **Din Rail Mounting**

### Companion Products

- **BLP™ 206 Series Processors**
- **MAXXESS Security Management Systems**
- **BUPS Power Supply**
- **Din Rail Mounting Kit (Two Modules)**
- **Enclosure Kit**



# MAXXESS

MAXXESS Systems, Inc.

## Input Module

### Specifications

#### REQUIREMENTS

##### ELECTRICAL

- Operation from 8-14 volts DC
- Current Draw: 50 mA maximum

##### MECHANICAL

- Input Module Circuit Board  
5.0" H x 2.575" W x 1.7" D  
(127mm x 70mm x 43.18mm)
- Input Module Enclosure  
14.3" H x 14.3" W x 3.6" D  
(363mm x 363mm x 92mm)

##### ENVIRONMENTAL

0°C to 50°C (32°F to 122°F)

##### ACCESSORIES

- DIN Mounting Kit
- Enclosure Kit
- BUPS Power Supply

##### WARRANTY

The Input Module comes with a two-year limited warranty.

#### Headquarters

1040 North Tustin Avenue  
Anaheim, CA USA  
92807

Tel 714 772 1000

800 842 0221

Fax 714 399 9358

Email sales@maxxess-systems.com

#### Service & Technical Support

Tel 714 772 1000

800 842 0221

Fax 714 399 9358

Email support@maxxess-systems.com

#### MAXXESS Systems Europe, Ltd.

##### Europe, Middle East, Africa

Doncastle House,  
Doncastle Road,  
Bracknell, Berkshire, UK  
RG12 8PE

Tel +44 (0) 1344 440083


Fax +44 (0) 1344 424658

Email sales@maxxess-systems.com

[www.maxxess-systems.com](http://www.maxxess-systems.com)

[www.maxxess.co.uk](http://www.maxxess.co.uk)

### eRAM and Input Module— LAN/WAN Configuration

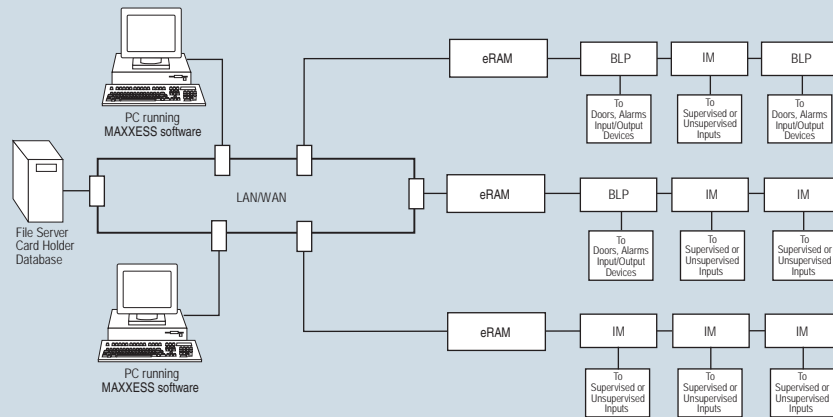

Information furnished by MAXXESS is believed to be accurate and reliable. However, no responsibility is assumed by MAXXESS for its use nor for any infringements of patents or other rights of third parties that may result from its use. No license is granted by implication or otherwise under any patent rights of MAXXESS Systems, Inc. Specifications subject to change without notice.